



Galvanized Sinusoid Sheets

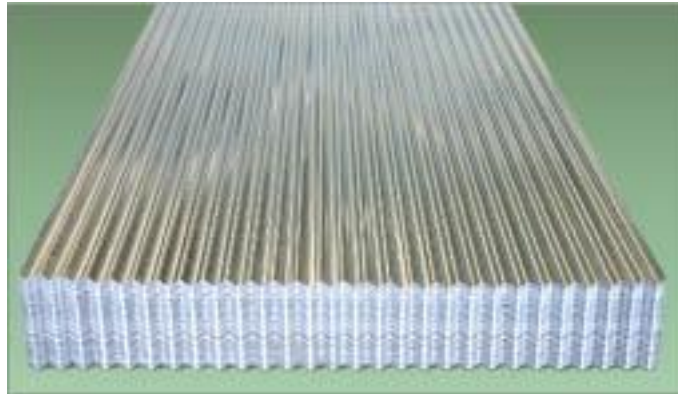

Galvanized Sinusoid Sheet

Dimensions in millimetres

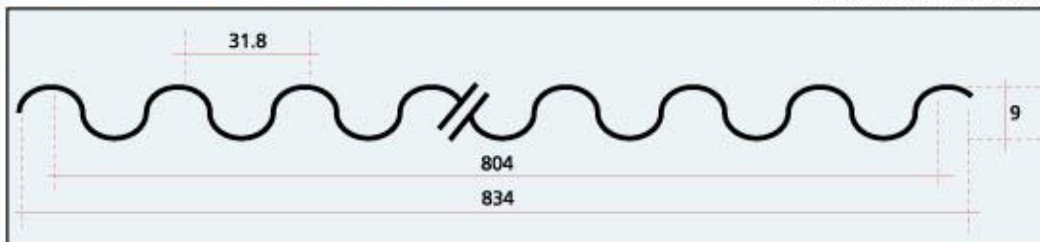

Technical Specifications:

Thickness: 0.25 mm - 0.50mm.

Length: min. 1000 mm, max. 3200 mm.

The effective width: 804 mm, (Tolerance: +25mm, -15 mm)

THICKNESS (mm)	0.30	0.35	0.40	0.45	0.50
The Weight of 1 m Length (kg/m)	2.38	2.53	2.93	3.34	4.00
The Weight of Effective Area (kg/m ²)	2.87	3.05	3.53	4.02	4.98

Galvanized Sinusoid Sheets Are Consumed In:

Production of shutters and slatted shutters for shops, stores and buildings.

As well as ceiling, claddings for decoration.